

Wiser Color Controller

EL-SJCON6KEY



Weight: 5 oz.
 Length: 3.5 in.
 Width: 2.75 in.
 Height: 1.1 in.
 Fixture Working Temp.: 68° - 140° F



Our Wiser Color Controller is a universal RGB LED control unit that can change the color of any RGB LED lighting fixtures in many different modes. It can work with RGB LED Flexible Lights or any full color fixture that uses 4 channels and has a common positive (common anode). With the Wiser Color Controller there are eleven RGB changing modes available and the speed of each mode can be adjusted wirelessly in increments of 1-100 with the remote control included with the unit. There are also 256 levels of brightness at your fingertips. The Wiser Color Controller is the key that unlocks the endless varieties of dynamic lighting in every one of our 12V RGB LED fixtures.

Easier to use than a TV remote control, the Wiser functions seamlessly with our 12V multi-color LED products, and can handle up to 4 amps of current for each channel. Some of the controller's features include: three- and seven-color strobe, three- and seven-color fade, as well as red, green, blue, pink, yellow, cyan, and white static modes. And this LED controller has memory! This means that you can cut the power to the unit and it will never forget the last function. The Wiser's DC power plug connects directly to an adapter, and joins the LED light fixture by connecting the matching red, green, blue, and power wires at the terminal block included with each controller.

The Wiser Controller also maximizes your options for situations like shop window displays and product display cases, so you can control and customize your lighting based on theme. The Wiser Color Controller is easy to install, so you can get the most out of your full color LEDs.

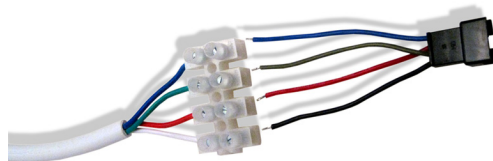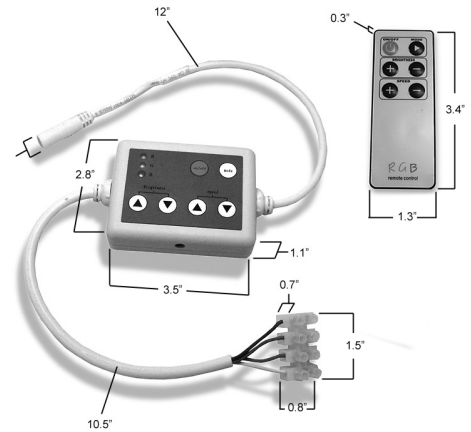

output power	output current	voltage	output	power consumption
<144W	<4A	12V DC	3 channels	<1W
<288W	<4A	24V DC	3 channels	<1W

The **Wiser RGB Color Controller** remote features:

On/Off switch

Mode switch: choose 1 of 11 modes

Brightness +/- button: each click goes up or down one of 256 brightness levels

Speed +/- button: each click goes up or down one of 100 speed levels

