


FLUID VIEW® 12V WET LOCATION LED STRIP LIGHT

SPECIFICATION SHEET

- Medium brightness
- Outdoor / wet location
- 16.4 ft. maximum run
- UL Listed & R/C SAM Manual
- Suitable for closet use
- 5-Year limited warranty




Ø .41 in.
(10.5mm)



3 ft. (Ø14mm) 20/2 AWG UL 2464 Wire


~ 2 in.
(50mm)



.65 in. (16.5mm)



H .2 in.
(5mm)



3 ft. (Ø14mm) 20/2 AWG UL 2464 Wire
Ø .19 in. (5mm)

Leads:
Red (+)
Black (-)

W .4 in.
(10mm)

SPECIFICATIONS

Input Voltage: 12VDC Constant Voltage
Power Consumption / ft.: 1.44W / 120mA
LED Chip Type: Epistar 3528 SMD Chip
LED Chip Beam Angle: 120°
LED Chips / ft.: 18
Mounting: Includes mounting clips & screws
Field Cuttable: ~ 2 in.
Maximum Run¹: 16.4 ft.
Connections²: 3 ft. female wet location plug one end, 3 ft. male wet location plug opposing end, Wire gauge: 20/2 AWG
Dimmable: Yes

Ambient Temp³: -4 ~ 122°F (-20 ~ 50°C)
Operating Temp⁴: -4 ~ 176°F (-20 ~ 80°C)
Environment⁵: Outdoor / wet location
Dimensions: .4 x .2 in. (W x H)
Certifications: UL Listed 2108. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. E469769 (UL Listed), E469770 (SAMS Manual). Suitable for installation in a clothes closet.
Included Items (per spool): 6 mounting clips, 12 screws, 5 end caps, 2 terminal caps, 1 Wet Location Splice Connector Pair

Item #	Connector Size	CCT (Kelvin) ⁶	Lumens / ft. ⁷	CRI	Efficacy (lm/W) ⁸
--------	----------------	---------------------------	---------------------------	-----	------------------------------

DI-12V-0051 (9.5 ft.)	10.5mm	3000K	98	70	68.1
-----------------------	--------	-------	----	----	------


- Note**¹ Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
- Note**² Wire leads and accessories are not rated for in-wall installation unless otherwise noted. Attached wire leads and connections are field-cuttable.
- Note**³ Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Note**⁴ Operating temperature is measured according to the minimum and maximum ambient temperature environment.
- Note**⁵ Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
- Note**⁶ Epistar 3528 SMD Chip binning ranges: (3000K 70 CRI: 2870-3045K).
- Note**⁷ Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Note**⁸ Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value has been provided and calculated as follows: Lumen value (measured in accordance to IES LM-79-08) divided by average power consumption per foot.

Item #:		Project:	
---------	--	----------	--

FLUID VIEW™ WET LOCATION 3000K

DI-12V-0051

POLAR CANDELA DISTRIBUTION GRAPH

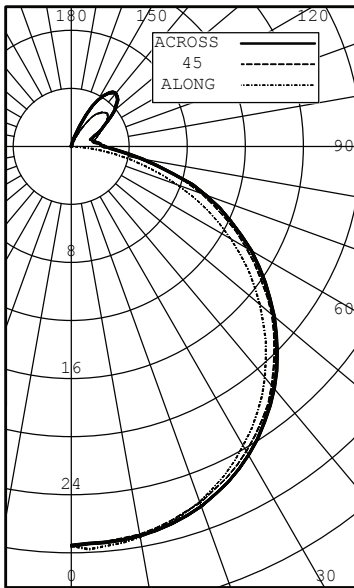

INTENSITY (CANDLEPOWER) SUMMARY

ANGLE	ALONG	22.5	45	67.5	ACROSS
0	28	28	28	28	28
5	28	28	27	27	27
15	27	27	27	27	27
25	25	25	25	25	26
35	22	23	23	23	23
45	19	20	20	20	20
55	15	16	16	16	16
65	10	11	12	12	12
75	5	6	7	7	7
85	1	3	3	3	3
90	0	2	2	2	2
95	0	1	2	2	2
105	0	1	2	2	2
115	0	1	2	2	2
125	0	1	3	3	3
135	0	1	3	4	5
145	0	0	2	4	5
155	0	0	0	2	2
165	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

ZONAL LUMENS AND PERCENTAGES

ZONE	LUMENS	% LUMINAIRE
0-30	22	22.25
0-40	36	36.83
0-60	65	66.74
0-90	87	89.04
40-90	51	52.21
60-90	22	22.31
90-180	11	10.96
0-180	98	100.00

Cone Of Light Tabulation










Mounting Height (Feet)	Footcandles at Nadir	Diameter (Feet)
4.00	1.72	5.22
6.00	0.766	7.82
8.00	0.431	10.4
10.0	0.276	13.0
12.0	0.192	15.6
14.0	0.141	18.3
16.0	0.108	20.9

* Photometric data complies with LM-79-08, ANSI C82.77-02.

ACCESSORIES

WET LOCATION CONNECTORS (10.5mm)

The following wet location connectors may be utilized in wet location environments. Never submerge these accessories under water. Connectors, extension cables, etc. are not rated for in-wall installations. Wet location connectors have a Class 2 amp rating: 60W/5A @ 12VDC; 100W/4.17A @ 24VDC. For additional information, please see the additional component sections of our website or catalog.

Item #	Type	Description	Image
DI-10MM-WL-DC-M-** DI-10MM-WL-DC-F-**	Wet Location Plug (10.5mm) to DC Adapter Connector	Attaches a wet location 10.5mm plug to a male DC accessory or plug-in adapter (not rated for wet location environments). Gender specification applies to the wet location connection only. • Dimensions: 7.5 x 0.45 in. (L x Dia)	
DI-10MM-WL-SCP-**	Wet Location Solder Connector Pairs (10.5mm Plugs)	Converts a wet location 10.5mm plug to a hard-wired connection (1 male & 1 female wet location plug). • Dimensions: 13 x 0.41 in. (L x Dia)	
DI-10MM-WLSP2-** DI-10MM-WLSP3-** DI-10MM-WLSP5-**	Wet Location Splitter Plug (10.5mm Plugs)	Splits a connection for wet location connectors. • Dimensions: 9.25 x 0.8 x 0.63 in. (L x W x H)	
DI-10MM-WL6EXT-** DI-10MM-WL12EXT-** DI-10MM-WL24EXT-**	Wet Location Extension Cable (10.5mm Plugs)	Creates an extension between wet location 10.5mm plugs. Male to female extension. • Dimensions: 6 x 0.41 in. (L x Dia) • Dimensions: 12 x 0.41 in. (L x Dia) • Dimensions: 24 x 0.41 in. (L x Dia)	
DI-0754 DI-0754-25 DI-0754-50	Wet Location Strip Light Mounting Clips	Mounts all wet location strip light. DI-0754 (10x clips, 20x phillips head screws) DI-0754-25 (25x clips, 50x phillips head screws) DI-0754-50 (50x clips, 100x phillips head screws)	
DI-0755-**	Wet Location Strip Light End Caps	End caps for sealing cut sections of FLUID VIEW & BLAZE wet location strip light (10x end caps). Dimensions: 0.40 x 0.47 x 0.24 in. (L x W x H)	
DI-0762-**	Wet Location Strip Light Sealant Kit	Kit for sealing cut sections of FLUID VIEW & BLAZE wet location strip light (10x end caps and 1x 1.5 oz. tube of silicone sealant).	
DI-0756	Wet Location Sealant	1.5 oz. tube of silicone sealant.	
DI-1740 (9.5 ft.) DI-0775-S (100 ft.)	3M™ Adhesive Tape	3M™ 4229 adhesive tape for indoor and outdoor installation of wet location LED fixtures.	

** Products available in 25 and 50 pack bulk quantities. Add -25 or -50 to each item # for bulk quantities.

SWITCHES, CONTROLS, LED DRIVERS, & SYSTEM DIAGRAMS

We offer a variety of switches, controls, and LED drivers (power supplies) to address all common light installations. For additional information, please see the additional component sections of our website or catalog. See the 'Solid Color Tape Light Installation Guide' for system diagrams and installation instructions. For additional questions and concerns please contact technical support.

ADDITIONAL RESOURCES

Visit the online product page at www.DiodeLED.com for additional resources including:

- **SOLID COLOR LED TAPE LIGHT Installation Guide**
For system diagrams and full installation instructions.
- **Voltage Drop Charts**
Use to specify appropriate wire gauge for installation. Available at the 'Tools & Resources' page at www.DiodeLED.com.

SAFETY & DISCLOSURES

- Install in accordance with the National Electric Code and local regulations.
- This product is intended to be installed and serviced by a qualified, licensed electrician.
- This product requires a compatible LED driver for proper configuration. Do not connect directly to high voltage 120–277V AC power.
- The UL Listing of this product requires the fixture to be powered with a compatible Class 2 DC constant voltage LED driver (power supply).
- It is generally recommended to load the driver no more than 80% the labeled rating for maximum performance and longevity. However, see each driver specification sheet for exact minimum and maximum loading values.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.
- Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
- Do not power tape light on the plastic spool or when tightly coiled. Excess heat may melt the spool and/or cause damage to the product.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
- Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
- Attached wire leads or wire accessories are not rated for in-wall installation unless otherwise noted.
- 'Voltage drop' is a gradual decrease in voltage along a conductor through which current is flowing. When specifying an LED system, ensure to calculate voltage drop appropriately. Voltage drop calculators will suggest the proper gauge wire and distance to install the driver from the fixture. To meet maximum performance, the beginning of the tape light should be receiving no less than 3% of input power rating.
- Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
- Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted.
- All fixture accessories including CLICKTIGHT™ connectors, DC connections, etc. have a Class 2 amperage rating unless otherwise noted (60W/5A @ 12V DC; 100W/4.17A @ 24V DC).
- Ensure wire leads at opposing ends of the tape light are not crossed when the fixture is turned on. It is acceptable to modify the length or cut off the attached wire leads and DC connections in the field.
- Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
- Lighting technology has some amount of gradual light degradation (output and/or color) over the lifespan of the products. Diode LED products are designed to minimize degradation, but some light degradation and color shift is a normal part of the life span of any LED lighting system.
- We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

WARRANTY INFORMATION

Limited Warranty

This LED fixture has a five (5) year limited warranty from the date of shipment. This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.DiodeLED.com under the 'Tools & Resources' tab. For warranty related questions, please contact customer service.

Consumer's Acknowledgment

Diode LED stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the right components is essential. Diode LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Diode LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Diode LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchaser agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Diode LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Diode LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Diode LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.



Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com
© 2015 Elemental LED, Inc. All rights reserved. Specifications are subject to change without notice.