



Flexible LED Strip Light / sold by the foot

EL-IMGRIB12V

UL #E348280
 Weight: 0.2 oz.
 Width: 0.3 in., Height: 0.1 in.
 LED Spacing: 0.65 in. (between centers)
 Cuttable : every 3 LEDs / 2 in.
 Max. length of one run: 16.4 ft.
 Spool Length: 16.4 ft.
 Fixture Surface Temp.: 68° - 90° F / 20° - 32° C
 UV/IR Radiation: None
 Lifespan: 50,000+ hours



Sold by the foot, the low profile of our Flexible LED Strip Light allows use in many discreet locations. This LED tape is available with a white or copper finish, and comes with a 3M adhesive backing, which allows easy mounting virtually anywhere. This flat UL Listed LED strip emits light in multiple directions with a 120° light beam angle. The Flexible LED Light Strip is designed to cast no shadows and boasts a desirable seamless glow.


The flexible design and high-intensity of LED lighting make it ideal for:

- cove lighting
- interior lighting
- exhibit lighting
- kitchen-cabinet lighting
- project lighting
- close application task lighting

And our Flexible LED Light Strips are dimmable! Customers are using our dimmable 12V drivers which allows you to use your current wiring and a 120V AC dimmer. There is no need to rewire. This 12-volt, environmentally friendly LED light is also low heat and does not emit any UV or infrared light.

Low energy consumption not only means saving money, it also can translate to an elimination of electrical shock and fire danger. This solid state Light Strip lasts for 50,000 hours which is 8 years if left constantly on. This strip will cost \$1.80 per foot if left on all year. LEDs are durable, small, and very efficient. Our Flexible LED Light is UL Listed and holds the prestigious ROHS certificate, which ensures that no environmentally harmful components were used in manufacturing.

Elemental LED fully controls all technical aspects of manufacturing which means if you are looking for a different style, whether in Brightness, Voltage or Color, we can customize! If your company has a special project or specific needs, please contact our support team at 877.564.5051.

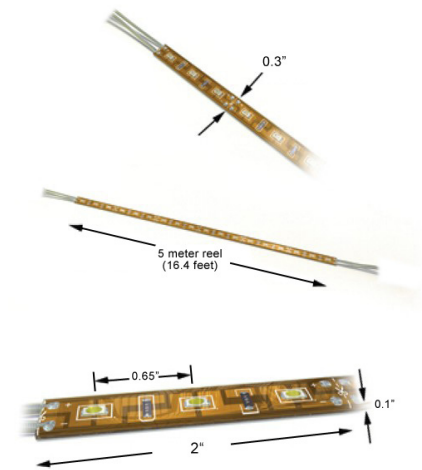

color	color temp.	voltage	lumens	IP rating	beam angle	LED type	power consumption / ft.	CRI	LEDs / ft.
warm white	2700k	12V DC	70	IP40	120°	3528 SMD	1.44W / 120mA	71	18
neutral white	5000k	12V DC	78	IP40	120°	3528 SMD	1.44W / 120mA	75	18