



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300

Photometric Indoor Test Report

Relevant Standards
IES LM-79-2008
ANSI C82.77-2002

Prepared For
Elemental LED Inc, DBA Diode LED
Wes Buck
Suite 211, 1195 Park Ave.
Emeryville, CA 94608
United States

Catalog Number
LINAIRE™ LED Wall Washer DI-LIN-6045-20
Project Number
10459969
Test Number
741498

Test Date

2014-09-05

Prepared By

Handwritten signature of Javier Caban in black ink.

Javier Caban, Technician

Approved By

Handwritten signature of Eric M. Gaudreau in black ink.

Eric Gaudreau, Engineering Project Handler

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300

Luminaire Description: Black aluminum housing, glass lens enclosure
Catalog Number: LINAIRE™ LED Wall Washer DI-LIN-6045-20
Lamp: 12 white LEDs, with frosted plastic optics below each
Mounting: Pendant
Ballast/Driver: LED power supply

Luminaire




Test Conditions

| | |
|-------------------|-----------|
| Test Temperature: | 24.5 °C |
| Voltage: | 120.0 VAC |
| Current: | 0.3968 A |
| Power: | 24.43 W |
| Power Factor: | 0.513 |
| Frequency: | 60 Hz |
| Current THD: | 162 % |



INTENSITY (CANDLEPOWER) SUMMARY OUTPUT LUMENS

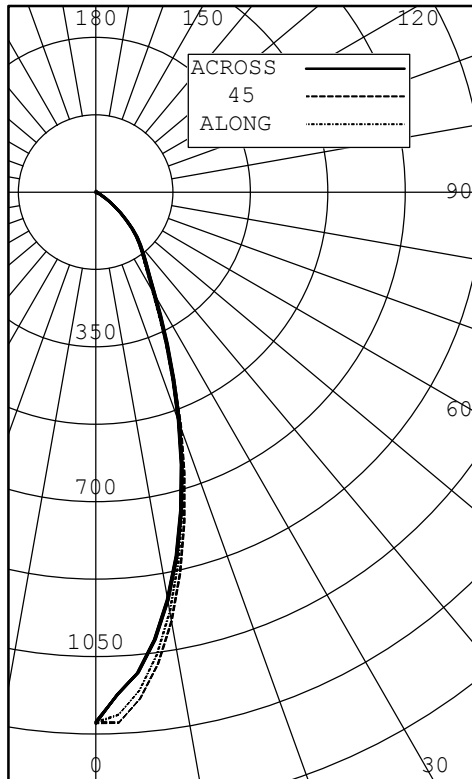

| ANGLE | ALONG | 22.5 | 45 | 67.5 | ACROSS | OUTPUT LUMENS |
|-------|-------|------|------|------|--------|---------------|
| 0 | 1200 | 1200 | 1200 | 1200 | 1200 | |
| 5 | 1131 | 1144 | 1150 | 1144 | 1091 | 104 |
| 10 | 963 | 976 | 985 | 984 | 937 | |
| 15 | 753 | 763 | 772 | 782 | 746 | 210 |
| 20 | 545 | 553 | 561 | 572 | 549 | |
| 25 | 374 | 376 | 383 | 396 | 381 | 177 |
| 30 | 256 | 260 | 265 | 274 | 264 | |
| 35 | 192 | 197 | 200 | 204 | 197 | 126 |
| 40 | 153 | 156 | 159 | 161 | 156 | |
| 45 | 116 | 118 | 121 | 122 | 116 | 91 |
| 50 | 75 | 76 | 78 | 79 | 74 | |
| 55 | 41 | 41 | 43 | 44 | 40 | 40 |
| 60 | 21 | 21 | 22 | 22 | 21 | |
| 65 | 11 | 11 | 11 | 11 | 11 | 12 |
| 70 | 5 | 5 | 6 | 6 | 5 | |
| 75 | 2 | 2 | 3 | 3 | 2 | 3 |
| 80 | 1 | 1 | 1 | 1 | 1 | |
| 85 | 0 | 0 | 0 | 0 | 0 | 0 |
| 90 | 0 | 0 | 0 | 0 | 0 | |

ZONAL LUMENS AND PERCENTAGES

| ZONE | LUMENS | % LUMINAIRE |
|--------|--------|-------------|
| 0-30 | 491 | 64.47 |
| 0-40 | 617 | 81.01 |
| 0-60 | 748 | 98.09 |
| 0-90 | 762 | 100.00 |
| 40-90 | 145 | 18.99 |
| 60-90 | 15 | 1.91 |
| 90-180 | 0 | 0.00 |
| 0-180 | 762 | 100.00 |

EFFICACY (LUMENS PER WATT): 31.2

*** THIS IS AN ABSOLUTE TEST ***

LUMINOUS LENGTH: 2.500 INS
 WIDTH: 19.250 INS

LUMINANCE SUMMARY CD./SQ.M.

S/MH: 0.6
 SC: 0.6

| ANGLE | ALONG | 45 | ACROSS |
|-------|-------|------|--------|
| 45 | 5283 | 5518 | 5292 |
| 55 | 2305 | 2420 | 2257 |
| 65 | 811 | 852 | 807 |
| 75 | 292 | 311 | 306 |
| 85 | 0 | 0 | 0 |

TESTED IN ACCORDANCE WITH IES PROCEDURES.



INTENSITY (CANDLEPOWER) DATA
 IN 2.5 DEGREE STEPS

| ANGLE | PLANE | | | | | | OUTPUT LUMENS |
|-------|-------|------|------|------|--------|---------|------------------|
| | ALONG | 22.5 | 45 | 67.5 | ACROSS | AVERAGE | |
| 0.0 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | |
| 2.5 | 1183 | 1196 | 1201 | 1193 | 1137 | 1187 | |
| 5.0 | 1131 | 1144 | 1150 | 1144 | 1091 | 1137 | 104 |
| 7.5 | 1055 | 1068 | 1076 | 1072 | 1021 | 1063 | |
| 10.0 | 963 | 976 | 985 | 984 | 937 | 974 | |
| 12.5 | 860 | 873 | 882 | 886 | 843 | 873 | |
| 15.0 | 753 | 763 | 772 | 782 | 746 | 766 | 210 |
| 17.5 | 647 | 657 | 665 | 675 | 646 | 661 | |
| 20.0 | 545 | 553 | 561 | 572 | 549 | 558 | |
| 22.5 | 454 | 458 | 465 | 477 | 459 | 464 | |
| 25.0 | 374 | 376 | 383 | 396 | 381 | 383 | 177 |
| 27.5 | 307 | 310 | 316 | 328 | 315 | 316 | |
| 30.0 | 256 | 260 | 265 | 274 | 264 | 265 | |
| 32.5 | 219 | 224 | 228 | 233 | 226 | 227 | |
| 35.0 | 192 | 197 | 200 | 204 | 197 | 199 | 126 |
| 37.5 | 171 | 175 | 178 | 180 | 175 | 177 | |
| 40.0 | 153 | 156 | 159 | 161 | 156 | 158 | |
| 42.5 | 135 | 138 | 140 | 142 | 136 | 139 | |
| 45.0 | 116 | 118 | 121 | 122 | 116 | 119 | 91 |
| 47.5 | 95 | 97 | 100 | 101 | 94 | 98 | |
| 50.0 | 75 | 76 | 78 | 79 | 74 | 77 | |
| 52.5 | 56 | 57 | 59 | 60 | 55 | 58 | |
| 55.0 | 41 | 41 | 43 | 44 | 40 | 42 | 40 |
| 57.5 | 29 | 30 | 31 | 31 | 29 | 30 | |
| 60.0 | 21 | 21 | 22 | 22 | 21 | 21 | |
| 62.5 | 15 | 15 | 16 | 16 | 15 | 15 | |
| 65.0 | 11 | 11 | 11 | 11 | 11 | 11 | 12 |
| 67.5 | 8 | 8 | 8 | 8 | 8 | 8 | |
| 70.0 | 5 | 5 | 6 | 6 | 5 | 6 | |
| 72.5 | 4 | 4 | 4 | 4 | 4 | 4 | |
| 75.0 | 2 | 2 | 3 | 3 | 2 | 2 | 3 |
| 77.5 | 1 | 1 | 1 | 1 | 1 | 1 | |
| 80.0 | 1 | 1 | 1 | 1 | 1 | 1 | |
| 82.5 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 85.0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 87.5 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 90.0 | 0 | 0 | 0 | 0 | 0 | 0 | |



COEFFICIENTS OF UTILIZATION

ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE = .20

| CC WALL | 90 | | | | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 | |
|------------|----|-------|------|------|-----|-------|------|------|-----|-------|------|------|-----|-------|------|------|-------|-------|------|-------|------|-------|------|------|-----|------|
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| RCR | 0 | 1.221 | .221 | .221 | .22 | 1.191 | .191 | .191 | .19 | 1.161 | .161 | .161 | .16 | 1.111 | .111 | .111 | .11 | 1.061 | .061 | .061 | .06 | 1.021 | .021 | .021 | .02 | 1.00 |
| | 1 | 1.161 | .131 | .111 | .09 | 1.141 | .111 | .091 | .07 | 1.121 | .091 | .071 | .05 | 1.051 | .031 | .02 | 1.011 | .000 | .99 | 0.980 | .970 | .96 | 0.94 | | | |
| | 2 | 1.111 | .061 | .020 | .98 | 1.091 | .041 | .010 | .97 | 1.071 | .030 | .990 | .96 | 0.990 | .970 | .94 | 0.970 | .940 | .92 | 0.940 | .920 | .90 | 0.89 | | | |
| | 3 | 1.060 | .990 | .940 | .90 | 1.040 | .980 | .930 | .90 | 1.020 | .970 | .930 | .89 | 0.940 | .910 | .88 | 0.920 | .890 | .86 | 0.900 | .870 | .85 | 0.84 | | | |
| | 4 | 1.010 | .930 | .880 | .84 | 0.990 | .920 | .870 | .84 | 0.980 | .910 | .870 | .83 | 0.890 | .850 | .82 | 0.870 | .840 | .81 | 0.850 | .830 | .80 | 0.79 | | | |
| | 5 | 0.960 | .880 | .820 | .78 | 0.950 | .870 | .820 | .78 | 0.930 | .860 | .810 | .77 | 0.840 | .800 | .77 | 0.830 | .790 | .76 | 0.810 | .780 | .75 | 0.74 | | | |
| | 6 | 0.920 | .830 | .770 | .73 | 0.900 | .820 | .770 | .73 | 0.890 | .810 | .760 | .73 | 0.800 | .760 | .72 | 0.790 | .750 | .72 | 0.770 | .740 | .71 | 0.70 | | | |
| | 7 | 0.870 | .780 | .720 | .69 | 0.860 | .770 | .720 | .68 | 0.850 | .770 | .720 | .68 | 0.750 | .710 | .67 | 0.740 | .700 | .67 | 0.730 | .700 | .67 | 0.65 | | | |
| | 8 | 0.840 | .740 | .680 | .64 | 0.820 | .730 | .680 | .64 | 0.810 | .720 | .670 | .64 | 0.720 | .670 | .63 | 0.710 | .660 | .63 | 0.700 | .660 | .63 | 0.62 | | | |
| | 9 | 0.790 | .700 | .640 | .60 | 0.780 | .690 | .640 | .60 | 0.770 | .690 | .640 | .60 | 0.680 | .630 | .60 | 0.670 | .620 | .59 | 0.660 | .620 | .59 | 0.58 | | | |
| | 10 | 0.760 | .660 | .600 | .56 | 0.750 | .660 | .600 | .56 | 0.740 | .650 | .600 | .56 | 0.640 | .600 | .56 | 0.640 | .590 | .56 | 0.630 | .590 | .56 | 0.55 | | | |

THE ABOVE COEFFICIENTS HAVE BEEN CALCULATED BASED ON LUMINAIRE LUMENS
 BECAUSE IN AN ABSOLUTE TEST THE BARE LAMP LUMENS ARE UNKNOWN.
 LIGHTING DESIGN CALCULATIONS MADE USING THESE COEFFICIENTS SHOULD
 THEREFORE USE THE LUMINAIRE LUMENS IN THE CALCULATION FORMULA

LABORATORY RESULTS MAY NOT BE REPRESENTATIVE OF FIELD PERFORMANCE.
 BALLAST AND FIELD FACTORS HAVE NOT BEEN APPLIED.

TEST DISTANCE EXCEEDS FIVE TIMES THE GREATEST
 LUMINOUS OPENING OF LUMINAIRE.



Cone of Light

Cone Of Light Tabulation

| Mounting Height (Feet) | Footcandles at Nadir | Diameter (Feet) |
|------------------------|----------------------|-----------------|
| 4.00 | 75.1 | 2.43 |
| 6.00 | 33.4 | 3.65 |
| 8.00 | 18.8 | 4.86 |
| 10.0 | 12.0 | 6.08 |
| 12.0 | 8.34 | 7.29 |
| 14.0 | 6.13 | 8.51 |
| 16.0 | 4.69 | 9.72 |

Cone of Light Plot

